




**APEX DYNAMICS**

# User manual planetary gearboxes AT / ATB - series




**AT-C**




**AT-H**




**AT-L1/R1**




**AT-L**



**AT-4M**




**AT-FC**



**AT-FH**




**AT-FL1/FR1**




**AT-FL**




**AT-LM/RM**




**ATB-C**



**ATB-H**




**ATB-L1/R1**




**ATB-L**




**ATB-4M**




**ATB-FC**



**ATB-FH**



**ATB-FL1/FR1**



**ATB-FL**



**ATB-LM/RM**

**Apex Dynamics BV**  
Churchillaan 101  
NL-5705 BK Helmond  
The Netherlands

**The Netherlands**  
Tel. : +31 (0)492 509 995  
E-mail: [sales@apexdyna.nl](mailto:sales@apexdyna.nl)  
Web : [www.apexdyna.nl](http://www.apexdyna.nl)

**Belgium**  
Tel. : +32 (0)3 808 15 62  
E-mail: [sales@apexdyna.be](mailto:sales@apexdyna.be)  
Web : [www.apexdyna.be](http://www.apexdyna.be)



# Table of content

|  |           |
|--|-----------|
| <b>1. Explanation of this document</b>               | <b>3</b>  |
| 1.1 Symbols  | 3         |
| 1.2 Warning  | 3         |
| <b>2. Safety</b>                                     | <b>4</b>  |
| 2.1 Intended use                                     | 4         |
| 2.2 Qualified personnel                              | 4         |
| 2.3 General safety instructions                      | 4         |
| 2.4 Standards and Guidelines                         | 5         |
| <b>3. Product description</b>                        | <b>6</b>  |
| 3.1 Identification plate                             | 7         |
| 3.2 Ordering code                                    | 7         |
| <b>4. Storage, packaging, transport and disposal</b> | <b>8</b>  |
| 4.1 Storage  | 8         |
| 4.2 Packaging and transport                          | 8         |
| 4.3 disposal   | 8         |
| <b>5. Assembly and commissioning</b>                 | <b>9</b>  |
| 5.1 Assembly in general                              | 9         |
| 5.2 Mounting the gearbox to the motor                | 9         |
| 5.3 Mounting the gearbox in an application           | 10        |
| 5.4 Operation  | 10        |
| <b>6. Maintenance</b>                                | <b>11</b> |
| 6.1 General  | 11        |
| <b>7. Malfunctions</b>                               | <b>12</b> |
| 7.1 General  | 12        |
| <b>8. Service</b>                                    | <b>13</b> |
| 8.1 General  | 13        |
| 8.2 Contact data                                     | 13        |

# 1. Explanation of this document

This user manual describes how to handle the Apex Dynamics planetary gearboxes during assembly and commissioning.

This manual applies to the following series:  
 AT-C, AT-FC, AT-H, AT-FH, AT-L1/R1, AT-FL1/FR1, AT-L, AT-FL,  
 AT-4M, AT-FLM/FRM

ATB-C, ATB-FC, ATB-H, ATB-FH, ATB-L1/R1, ATB-FL1/FR1, ATB-L, ATB-FL,  
 ATB-4M, ATB-FLM/FRM

This manual contains important information regarding the use and maintenance of the gearboxes.

## 1.1 Symbols

The following warning symbols are used in this manual:



Information

This symbol indicates important information that must be observed for correct and safe installation of the gear units.



Warning

This symbol indicates dangers and warnings.



Call for action

This symbol indicates when something needs to be done.

## 1.2 Warning

Warnings must always be followed, failure to follow the warning instructions can cause danger or cause the gearbox to malfunction.

Warnings are indicated as follows:

**Type or source of danger**



Action to avoid the danger.

## 2. Safety

This chapter describes the safety regulations that must be observed for the safe and danger-free use of planetary gearboxes.  
Possible sources of danger and necessary safety regulations are also indicated.

### 2.1 Intended use

Planetary gearboxes are intended for industrial applications.



The specifications as described in the factory documentation must not be exceeded.



The planetary gearboxes may only be used if the machine in which the gearboxes are installed complies with all guidelines and regulations that apply to the machine in question.

### 2.2 Qualified personnel

All work with planetary gear units may only be performed by qualified personnel and in compliance with current safety regulations.



Always make sure that the personnel has read and understood the user manual!

### 2.3 General safety instructions



Improper use, incorrect installation or operation and overdue maintenance can cause serious damage to property and/or personal injury.



Please observe the following safety instructions before commissioning the planetary gear units:

- Never make any changes or modifications to the gearboxes.
- Never perform work on the gearboxes other than those described in this manual.
- Always make sure the gearbox type is visible and known.
- Never remove the type description and serial number from the gearbox.
- Before commissioning, ensure that all axes are correctly attached.
- Always ensure that possible sources of danger are covered and/or secured (eg rotating parts).
- Always comply with the manufacturer's conditions when starting up.
- Never use damaged parts in combination with the gear units.
- Always ensure sufficient convection (heat dissipation) when using the gearbox.

## 2. Safety

### 2.3 General safety instructions (continued)



- Gearboxes can heat up considerably during use. When working on the gear unit, always allow it to cool down first. Always pay close attention to hot lubricants.
- Only work on the gearbox when it is stationary, the driving motor is switched off and secured against restarting.
- Have repairs carried out within the warranty period only by Apex Dynamics.

### 2.4 Standards and Guidelines

#### 2.4.1 Machinery Directive 2006/42/EG

A gearbox is considered a “machine component” and therefore not subject to the EC Machinery Directive 2006/42/EC.

Using and startup the gearbox is prohibited within the scope of the EC Machinery Directive until it has been determined that the machine in which the gearbox is installed meets the regulations of the EC Machine Directive.

#### 2.4.2 RoHs

All Apex Dynamics planetary gearboxes comply with the European RoHs directive as mentioned in RoHs (2011/96 / EC). All our products are purely mechanical and contain no electronic or electrical components.

#### 2.4.3 REACH

According to the definitions of the European directive (EC 1907/2006 / EU) regarding REACH, the planetary gear units that Apex Dynamics imports and / or manufactures in the EU are not subject to registration.

#### 2.4.4 ATEX

Apex Dynamics Inc., declares that the design, manufacture and inspection of the products described in this manual are in accordance with the provisions of Annex VIII (EHSR) of the ATEX Directive 94/9 / EC.



## 3. Product description



APEX DYNAMICS, INC.

HIGH PRECISION  
SPIRAL BEVEL GEARBOX

AT / ATB Series



- **AT Series**
- Spiral bevelwiel gearboxes
- Stainless steel housing
- Stainless steel input and output shaft; hollow, with or without key
- Spiral gear design, Nominal torque from 12 tot 3200 Nm
- 5 variants with or without motorflange
- 9 sizes van 65 tot 280mm
- Backlash 6, 8 en 10 arcmin
- Lifetime lubricated
- Protection class IP65, Operating temperature 0°C ~ +90°C



APEX DYNAMICS, INC.

HIGH PRECISION  
SPIRAL BEVEL GEARBOX

AT / ATB Series



- **ATB Series**
- Spiral bevelwiel gearboxes
- Steel black oxidized housing
- Steel input and output shaft; hollow, with or without key
- Spiral gear design, Nominal torque from 12 tot 3200 Nm
- 5 variants with or without motorflange
- 9 sizes van 65 tot 280mm
- Backlash 6, 8 en 10 arcmin
- Lifetime lubricated
- Protection class IP65, Operating temperature 0°C ~ +90°C

For detailed specifications, we refer to the product documentation and / or website of Apex Dynamics.



# 3. Product description

## 3.1 Identification plate (laser engraved)



Each gearbox is executed with a laser-engraved type code.

Example:

**APEX DYNAMICS, INC.**

Model NO: AT140-S1


S/N: 1711106246

Ratio: 010:1

Backlash: ≤ 6 arcmin

## 3.2 Ordering code

The order code for an Apex Dynamics gearbox is structured as follows:

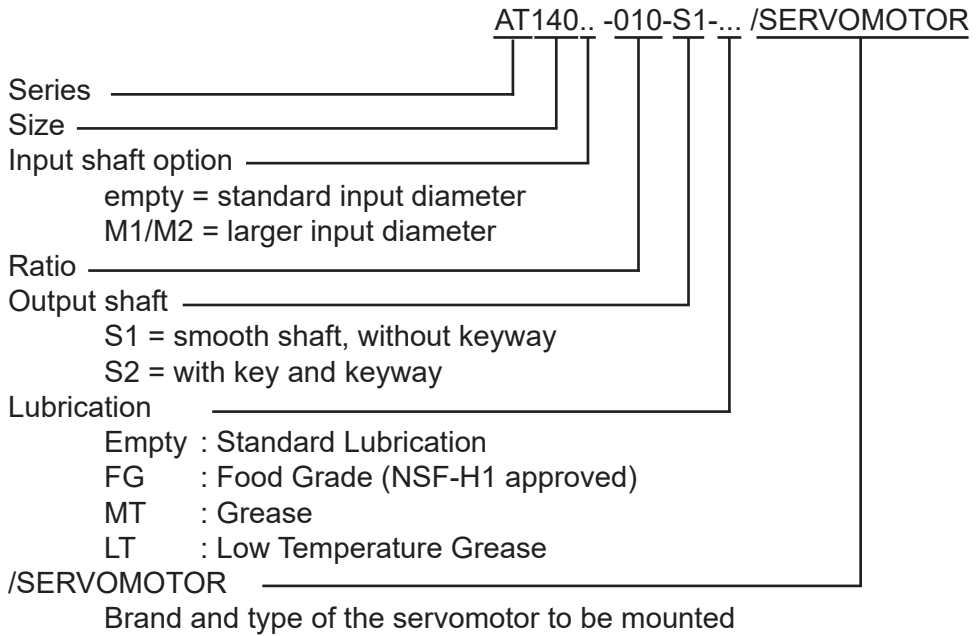

## 4. Storage, packaging, transport and disposal

### 4.1 Storage



The gearboxes must be stored dry and in original packaging.  
Storage temperature,  $-30^{\circ}\text{C} \sim +60^{\circ}\text{C}$ . Try to keep the storage time as short as possible.

### 4.2 Packaging and transport



The gearboxes are packed in polystyrene or polyurethane foam filling, which means that they are fully protected against transport damage during normal use.



Never drop a gearbox!



Transport a gearbox only in the original packaging!



Protect the packaging and its contents against moisture!

### 4.3 disposal



Always follow the applicable regulations when removing gearboxes!  
Consult the local authority or local regulations for this.



Housing parts, gears, shafts and bearings of the gearboxes must be disposed of as steel scrap. This also applies to the aluminum parts, insofar as there is no separate collection.



Collect used lubricant and dispose it accordance within the applicable regulations.



# 5. Assembly and commissioning

## 5.1 Assembly in general



For correct operation and optimum service life, the following instructions must be carefully observed:

- Ensure that the gearbox has sufficient convection.
- Take care that the gearbox can dissipate sufficient heat through the output flange.
- A motor or other external heat sources can heat up the gearbox. Therefore always inquire with the manufacturer / supplier about the occurring motor temperatures.
- Always observe the applicable restrictions regarding the protection class (see Chapter 3.).

## 5.2 Mounting the gearbox to the motor



The input side of the gearboxes is protected against corrosion, always ensure that this protective layer is removed before assembly (degrease).

Always use the correct tools when mounting the motor on the gearbox.



Mount the motor according to the correct installation manual.

- An English-language mounting manual is supplied with every gearbox.
- Mounting instructions in other languages can be downloaded on: [www.apexdyna.nl](http://www.apexdyna.nl) or [www.apexdyna.com](http://www.apexdyna.com).
- Below a table is shown with the recommended tightening torques for mounting bolts. Apex Dynamics uses quality class 12.9.

| Bolt size   | Width across flat | Strength 8.8 Tightening torque |          | Strength 10.9 Tightening torque |          | Strength 12.9 Tightening torque |          |
|-------------|-------------------|--------------------------------|----------|---------------------------------|----------|---------------------------------|----------|
|             | [mm]              | [Nm]                           | [In-lbs] | [Nm]                            | [In-lbs] | [Nm]                            | [In-lbs] |
| M3 x 0.5P   | 2.5               | 1.3                            | 12       | 1.8                             | 16       | 2.1                             | 19       |
| M4 x 0.7P   | 3                 | 3                              | 27       | 4.1                             | 37       | 4.9                             | 44       |
| M5 x 0.8P   | 4                 | 6.1                            | 55       | 8.2                             | 73       | 9.8                             | 87       |
| M6 x 1P     | 5                 | 11                             | 98       | 14                              | 124      | 17                              | 151      |
| M8 x 1.25P  | 6                 | 25                             | 222      | 34                              | 302      | 41                              | 364      |
| M10 x 1.5P  | 8                 | 49                             | 434      | 67                              | 594      | 80                              | 709      |
| M12 x 1.75P | 10                | 85                             | 753      | 116                             | 1028     | 139                             | 1232     |
| M14 x 2P    | 12                | 137                            | 1214     | 186                             | 1648     | 223                             | 1976     |
| M16 x 2P    | 14                | 210                            | 1860     | 286                             | 2534     | 343                             | 3038     |

## 5. Assembly and commissioning

### 5.3 Mounting the gearbox in an application



The gearboxes from Apex Dynamics can be installed in any position.



The following must be taken into account when mounting the gearbox:

- Always use the right tools and aids.
- Check if the gearbox is undamaged (no damage due to transport or storage). In particular the output shaft, seals and mounting surfaces.
- Ambient temperature within the specification of the gear unit.
- Output shafts and flange surfaces must be thoroughly cleaned with anti-corrosion agents. Ensure that solvents do not come into contact with seals.
- Tighten fixing materials in accordance with the applicable regulations (see also table with tightening torques in section 5.2).
- Ensure proper alignment of the output shaft.
- Applied transmission elements (like a coupling) must be balanced and may not cause inadmissible radial and / or axial forces.
- For timing belt pulley applications follow the specifications of the timing belt supplier. Be aware of excessive radial forces, always check timing belt tension with appropriate measuring equipment

### 5.4 Operation (commissioning)



Always allow the gearbox to run in first (trial run). Increase the load and circulation speed in two to three steps up to the maximum.



Pay attention to the following at a in run or trial run:

- Always check the maximum permissible input speed and torque when starting up.
- Is the gearbox running smoothly?
- Are vibrations or unusual running noises occurring?
- Is there any leakage at the in- and output side of the gearbox?
- Check whether the housing temperature remains within the specified specification.

## 6. Maintenance

### 6.1 General



All gearboxes from Apex Dynamics are lubricated for life, replacement / additional lubricant is therefore not necessary within the specified lifespan. The gearboxes are maintenance-free, to guarantee the service life it is important to regularly check the gearboxes.



Check the seals for leakage at least after every 2,500 operating hours or every six months.



Regularly check whether the housing temperature remains within the specified specification.

# 7. Malfunctions

## 7.1 General



Contact Apex Dynamics BV in the following situations:

- Irregular or extreme noise
- Temperature increase
- Leakage

We always need the following information for a malfunction message:

- Full type number, with serial number and mounted motor.
- Clear description of the malfunction.
- Environmental conditions during and before the malfunction report.
- Application data:
  - Kind of application
  - Motion profile
  - Torques (nominal and maximum)
  - Radial and axial load
  - Continuous (S1) or cyclic (S5) operation

## 8. Service

### 8.1 General



Gearboxes from Apex Dynamics are generally not overhauled. A gear unit is made up of various components that have been run into each other, so replacing or overhauling individual components is not an option.

### 8.2 Contact data

For questions and / or problems you can contact Apex Dynamics BV.

|           |   |  |
|-----------|---|--|
| Company   | : Apex Dynamics BV  |  |
| Address   | : Churchillaan 101<br>NL-5705 BK Helmond<br>The Netherlands |  |
| Telephone | : +31 (0)492 509 995  | +32 (0)3 808 15 62                                       |
| Internet  | : <a href="http://www.apexdyna.nl">www.apexdyna.nl</a>      | <a href="http://www.apexdyna.be">www.apexdyna.be</a>     |
| E-mail    | : <a href="mailto:sales@apexdyna.nl">sales@apexdyna.nl</a>  | <a href="mailto:sales@apexdyna.be">sales@apexdyna.be</a> |